



Installation frame (Rollfix Pro)

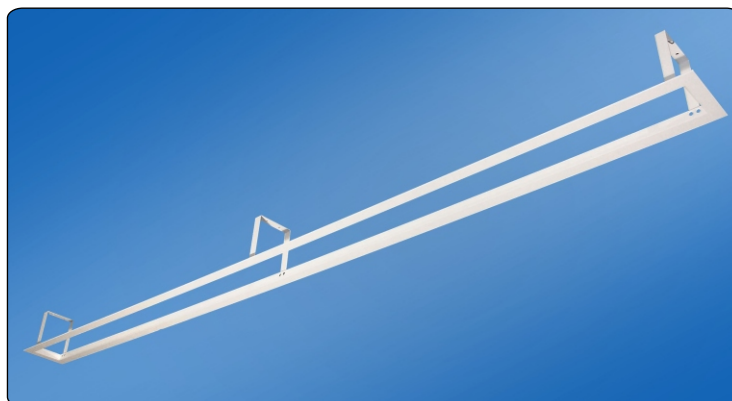

screen installed
in suspended ceiling

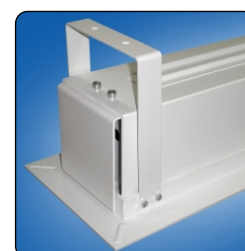



Rollfix Pro Electric
and Installation frame



flat plug connection

Highlights

- Enables convenient and visually attractive installation in suspended ceilings with the possibility of easy removal for inspection
- Specially developed for the installation of Rollfix Pro in suspended ceilings
- Supplied with a flat plug so that the screen can be connected to the power supply and subsequently disconnected when necessary for servicing purposes
- Frame made of 1,5 mm thick aluminium
- White colour of frame (RAL 9003)
- Mounting set for installation is included in delivery

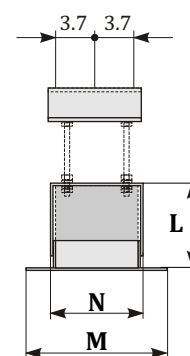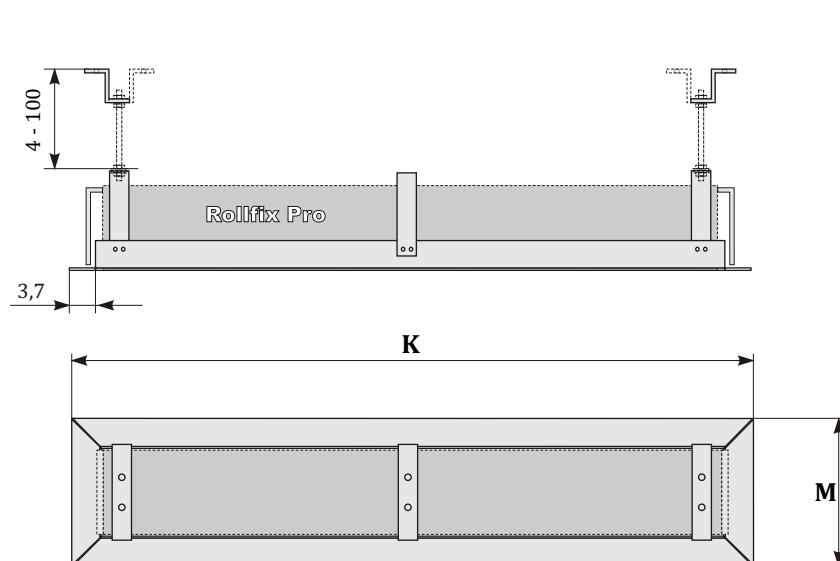

Dimensions in cm

Width of screen	K	L	M	N
180 / 170*	201,4	17,1	19	12,2
200 / 190*	221,4	17,1	19	12,2
240 / 230*	261,4	17,1	19	12,2
250 / 240*	271,4	19,1	21	14,2
270 / 260*	291,4	19,1	21	14,2
300 / 290*	321,4	19,1	21	14,2
350 / 340*	371,4	19,1	21	14,2

*Rollfix Pro TabTension